
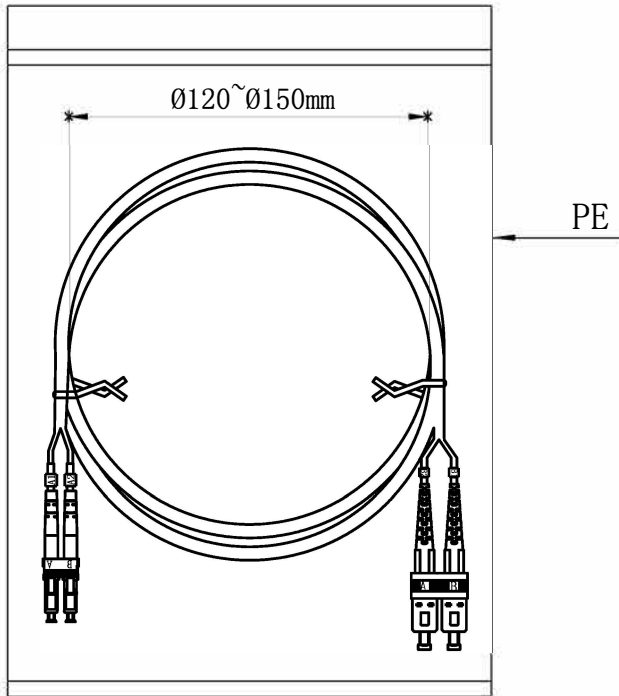


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

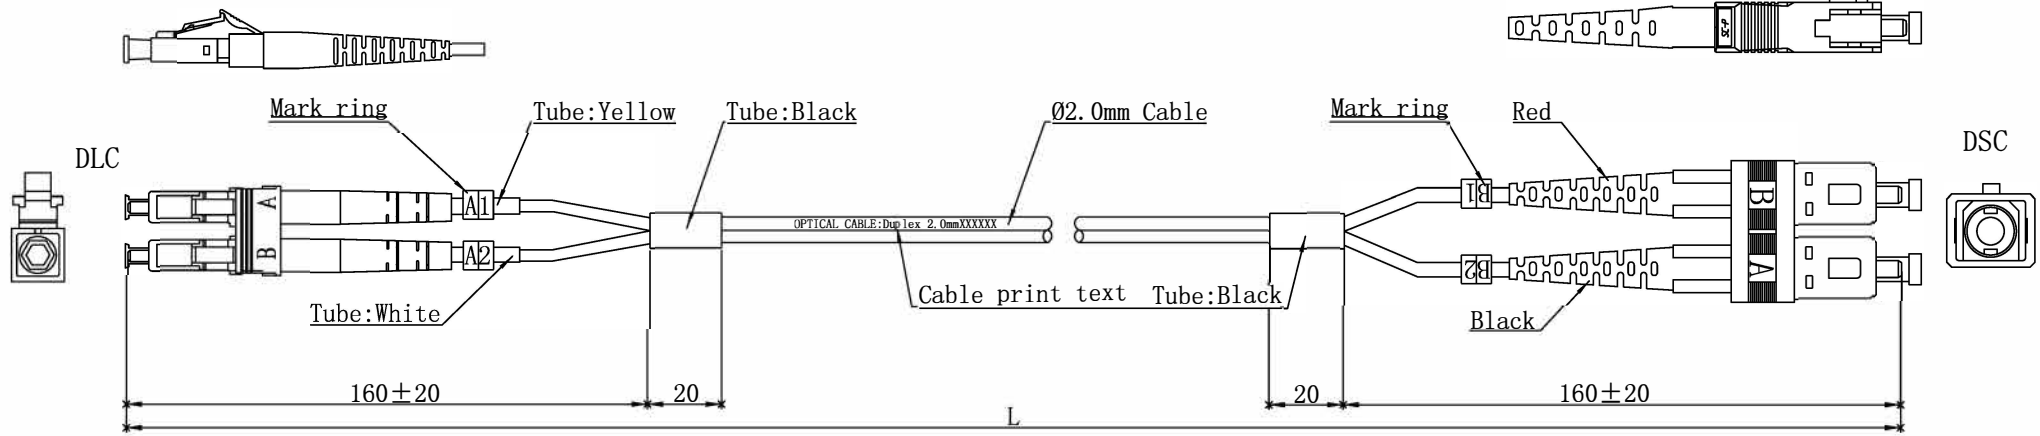

Specifications:

Type	DLC/UPC-DSC/UPC
Fiber Mode	OM4
Core Diameter (um)	50/125
Operating Wavelength (nm)	850/1300
Cable Color	Aqua
Cable Diameter (mm)	Ø2.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
Insertion loss (dB)	≤0.2dB
Return loss (dB)	≥35dB
SC Connector Color (Boot)	Red/Black

$L \leq 5m$, TOLERANCES: $0 \leq \Delta L \leq 5cm$
$L > 5m$, TOLERANCES: $0 \leq \Delta L \leq 1\% * L$

LANshack

Sales@LANshack.com | 888-568-1230

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:

.x	+1
.xx	+0.2
.xxx	+0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-SC-DX OM4 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO. SFPC-OM4-AQ-LCSC-XX
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm