
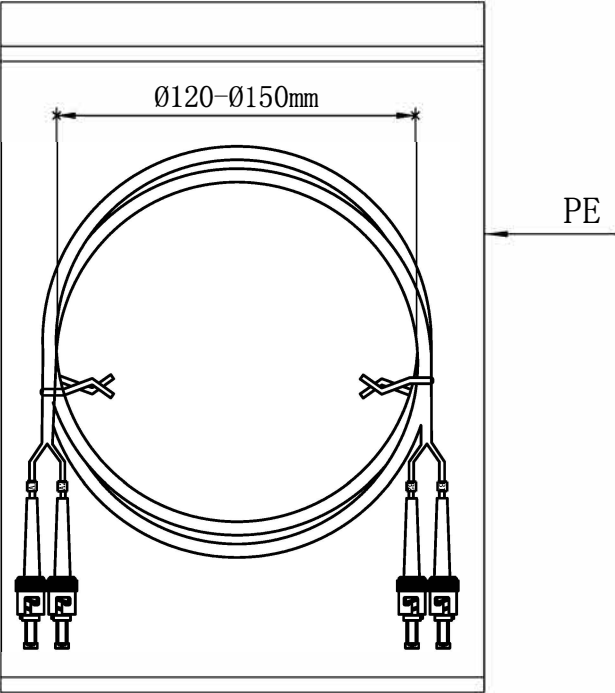


Rev.	Rev. Date	Modified By	Brief Description

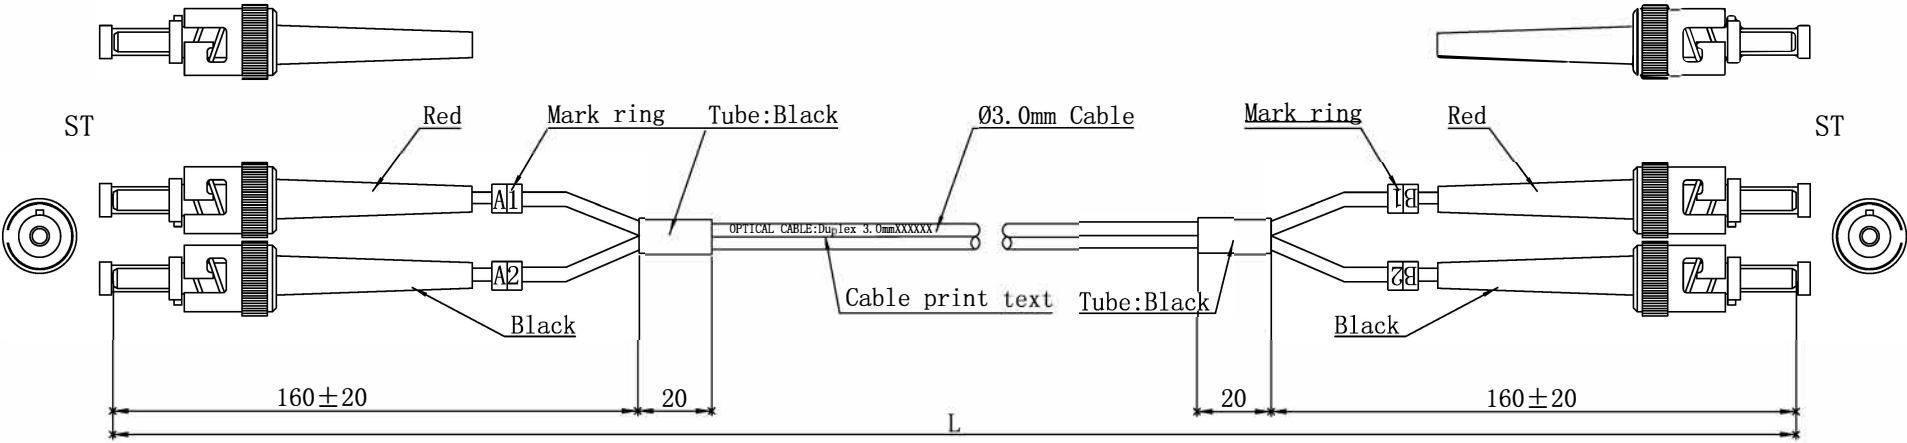

Specifications:

Type	ST/UPC-ST/UPC
Fiber Mode	SM
Core Diameter(um)	9/125
Operating Wavelength(nm)	1310/1550
Cable Color	Yellow
Cable Diameter(mm)	Ø3.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
ST Connector Color(Boot)	Red/Blcak
Insertion loss(dB)	≤0.3dB
Return loss(dB)	≥50dB

L≤5m, TOLERANCES:0≤ΔL≤5cm
L>5m, TOLERANCES:0≤ΔL≤1%*L

LANshack

Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: ST-ST-DX SM Patchcord
CHECKED BY	SHEET 1of1	ITEM NO. SFPC-SM-STST-XX
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm

①					
②					
③					
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT	

Unless specified on the drawing,
tolerances are per the follows:

.x	+1
.xx	+0.2
	+0.05