



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	LM	NEW
A/1	2021.03.18	Arvin	Add "Plug Size" "Wire printing" "Operating temperature"

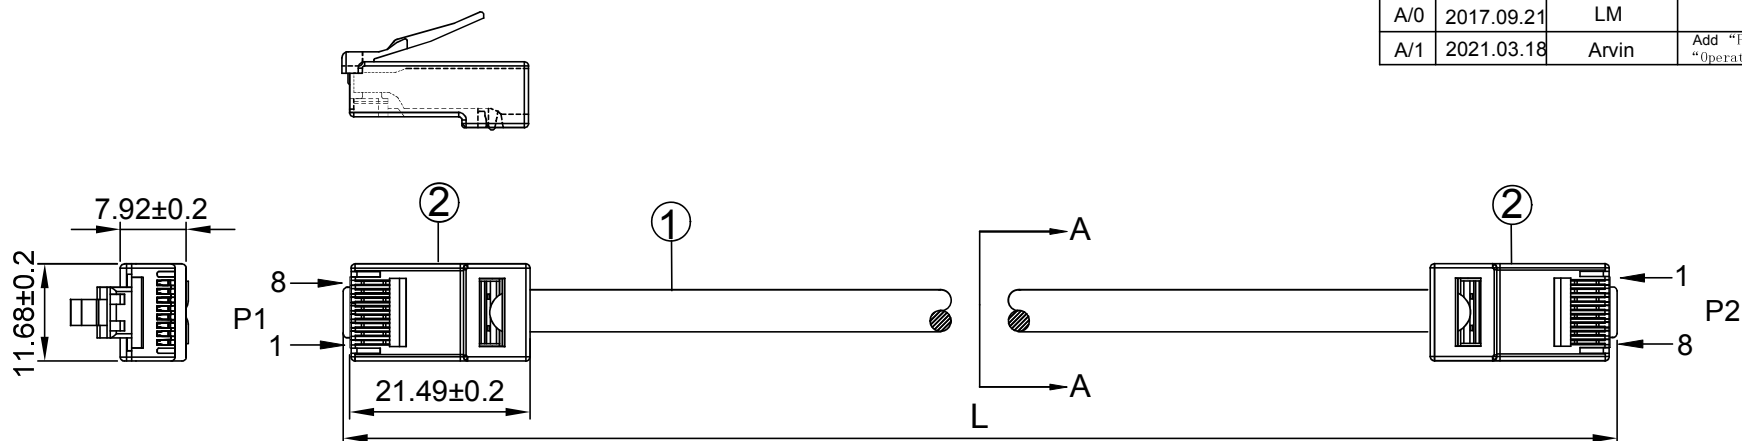

INK MARKING <FP2047> : YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568.2-D ETL/3P
VERIFIED ▲ 24AWGX4P PATCH TYPE CMX(UL) E164469-XX

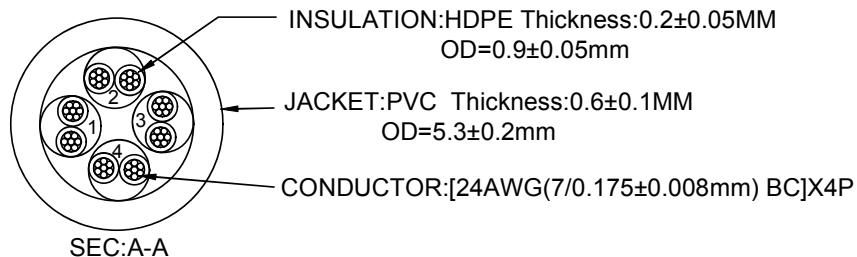

Operation Temperature:-20°C~+60°C

conductor resistance:120.1(Ω/Km) at 20°C

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	10	±2	1.67%
1	±1.2	10%	15	±3.15	1.75%
1.5	±1.2	6.67%	20	±4	1.67%
2	±1.2	5%	25	±4	1.33%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	75	±6	0.67%
5	±1.2	2%	100	±6	0.5%
6	±1.2	1.67%	150	±6	0.33%
7	±2	2.38%	200	±6	0.25%

LANshack
Sales@LANshack.com | 888-568-1230

②	PLUG	8P8C 50U RJ45	2	PCS
①	CABLE	CAT.6 UTP PVC 24AWG*4P BC	A/R	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY Arvin	DATE: 2021/03/18	DESCRIPTION: CAT 6 PATCH CABLE (NON-BOOTED)
CHECKED BY YB	SHEET 1 of 1	ITEM NO. C6-4P-WJBB-XX-XX-XX
APPROVED BY CQ	SCALE 1:1	REV. 01 UNIT:mm