



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	TD	NEW
A/1	2021.03.11	RJ	Add "Plug Size" "Wire printing" "Operating temperature"

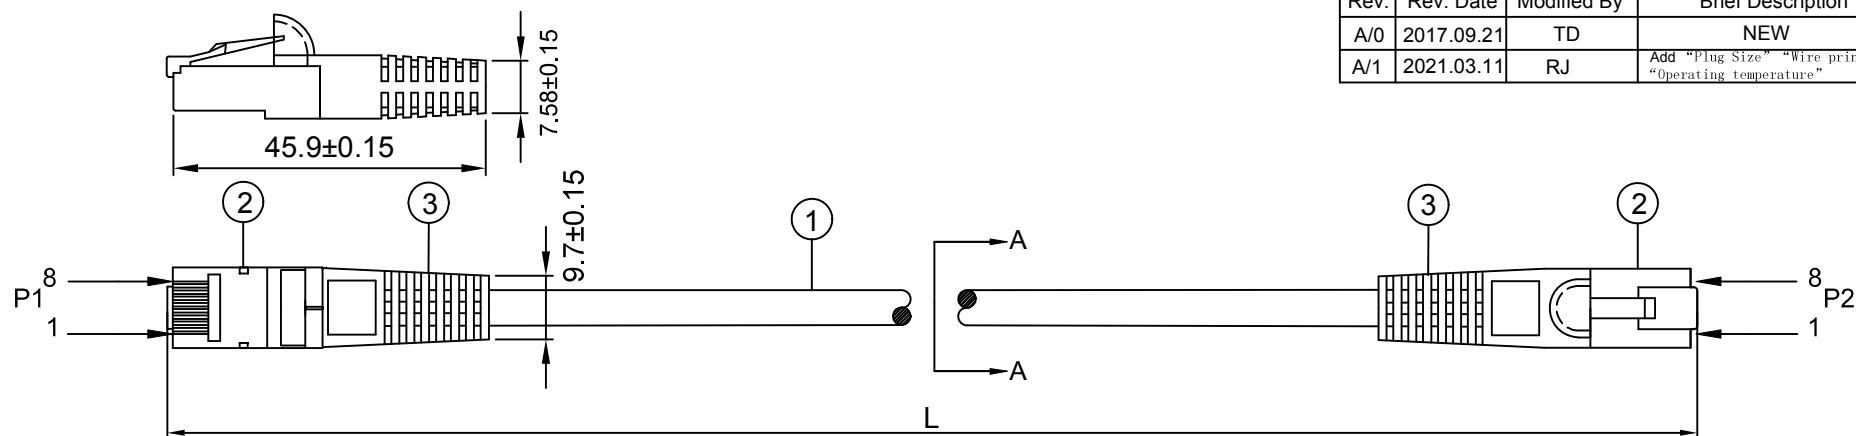

INK MARKING <FP2053> : YFC CAT.7 SFTP PATCH 3P VERIFIED TO ANSI/TIA-568.2-D & ISO/IEC 11801 ED.2 & EN 50288-4-2 & IEC 60332-1-2 ▲ 26AWGX4P CMX(UL)

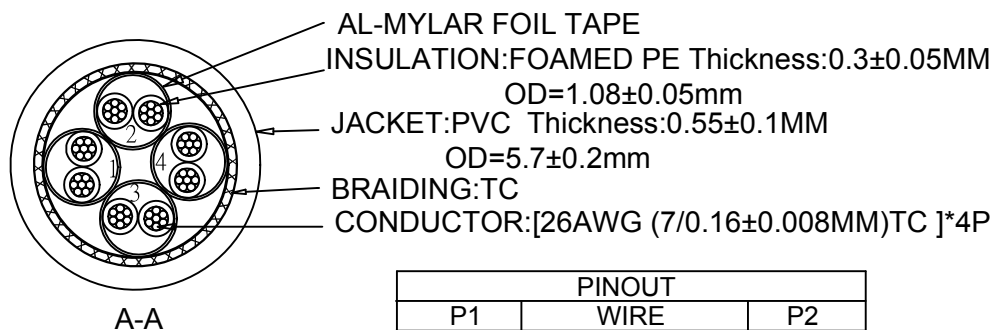

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8
SHELL	BRAID	SHELL

Operation Temperature: -20°C~+60°C
conductor resistance: 152.↓(Ω/Km) at 20°C

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
1	±1.2	10%	15	±3.15	1.75%
2	±1.2	5%	20	±4	1.67%
3	±1.2	3.33%	25	±4	1.33%
4	±1.2	2.5%	30	±6	1.67%
5	±1.2	2%	40	±6	1.25%
6	±1.2	1.67%	50	±6	1.0%
7	±2	2.38%	60	±6	1.0%
8	±2	2.08%	70	±6	0.67%
9	±2	1.85%	80	±6	0.59%
10	±2	1.67%	90	±6	0.5%
12	±2	1.39%	100	±6	0.5%

LANshack
Sales@LANshack.com | 888-568-1230

③	MOLD	PVC YUS-07	A/R	Kg
②	PLUG	8P8C 50U RJ45	2	PCS
①	CABLE	CAT.7 SFTP PVC 26AWG*4P TC	A/R	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY RJ	DATE: 2021/03/18	DESCRIPTION: CAT 7 DOUBLE SHIELDED PATCH CABLE
CHECKED BY TD	SHEET 1 of 1	ITEM NO. C7-4P-WJBB-XX-XX
APPROVED BY AD	SCALE 1:1	REV. 01 UNIT:mm