

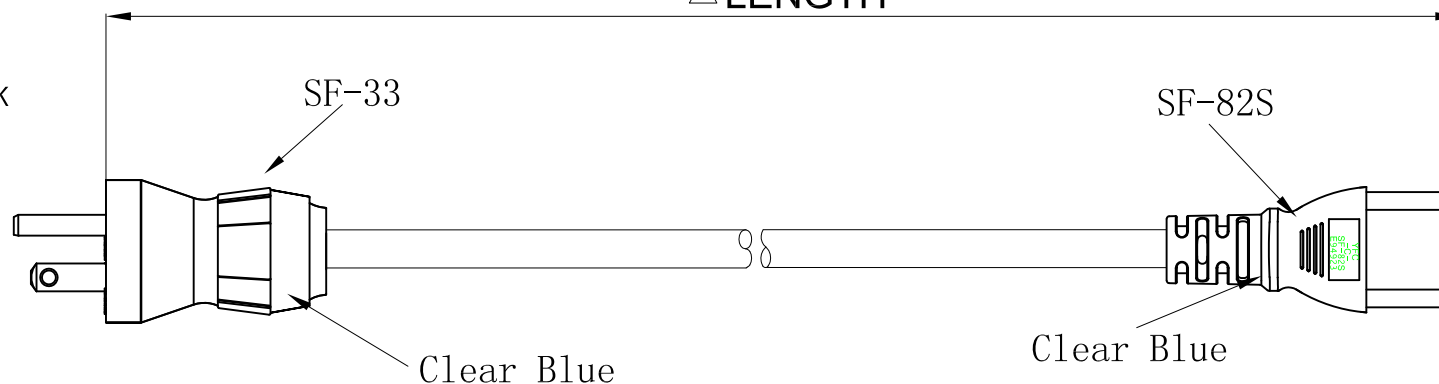


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION


Rev.	Rev. Date	Modified By	Brief Description
A/0	2016/4/19	Susam	NEW
A/1	2016/4/26	Susam	CHANGE

△ LENGTH



conductor resistance: 23.256 ohms/km at 25°C

WIRE MARKING

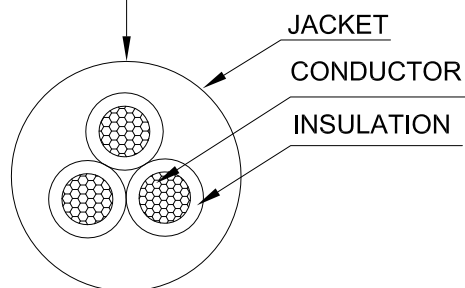

item	color	length(ft)	tolerance(ft)	length(mm)	tolerance(mm)
PC-HG-G-15PC13-183-CB-3	Clear Blue	3	0.05/-0.03	914	15/-10
PC-HG-G-15PC13-183-CB-6	Clear Blue	6	±0.07	1829	±20
PC-HG-G-15PC13-183-CB-10	Clear Blue	10	±0.10	3048	±30
PC-HG-G-15PC13-183-CB-15	Clear Blue	15	±0.10	4572	±30

WIRE MARKING
(Hollow)
NO. 5

(UL) E135710-F3 SJT 3X18AWG 60°C 300V VW-1 CSA LL95737
SJT 3X0.824mm2(18AWG) 60°C 300V FT2

REMARKS:

- 1.PLUG(SF-33) RATED POWER:125V 10A
- 2.CONNECTOR(SF-82S) RATED POWER:125V 10A
- 3.WIRE: SJT 3X18AWG 60°C RATED VOLTAGE:300V
- 4.DVW TEST:1500V,1S
- 5.POLARIZATION AND CONTINUITY TEST
- 6.COMPLY WITH UL817 STANDARD
- 7.CABLE COLOR: GY

LANshack
Sales@LANshack.com | 888-568-1230

DRAWN BY Susam

DATE:
2016/4/26

DESCRIPTION:
SF-33+SF-82S SJT 3X18AWG 60°C

CHECKED BY QinRao

SHEET 1 of 1

ITEM NO. PC-HG-G-15PC13-183-CB-X

APPROVED BY



SCALE 1:1

REV. 00

UNIT: mm

