
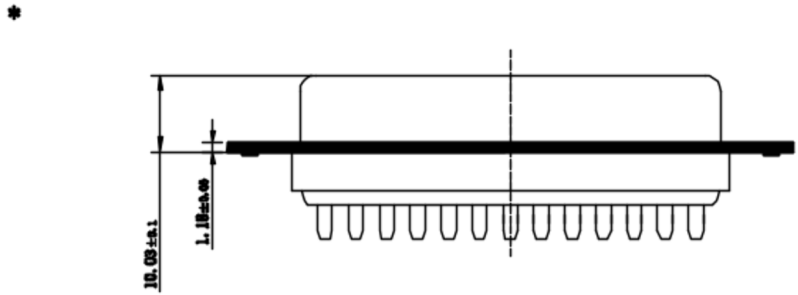


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

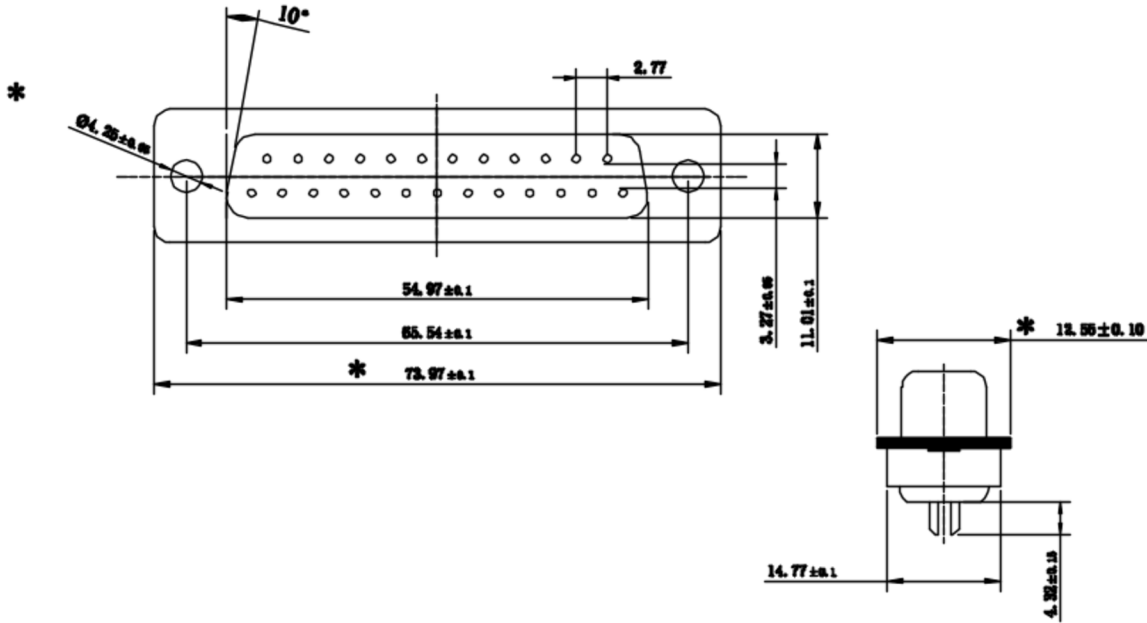

SPECIFICATIONS

- 1. ELECTRICAL CHARACTERISTICS:**
- 1-1. CONTACT CURRENT RATING: 3 AMPERES.
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC (MIN) AT SEA LEVEL
 - 1-3. INSULATION RESISTANCE: 100 MEGOHMS (MIN)
- 2. MECHANICAL CHARACTERISTICS:**
- 2-1. CONTACT ENGAGEMENT FORCE: 12 OZ. (MAX)
 - 2-2. CONTACT SEPARATION: 0.75 OZ. (MIN)
 - 2-3. CONTACT RETENTION: 4.41 LB. (MIN)
 - 2-4. CONNECTOR MATING FORCE: 3/4 LB. *NO. OF CONTACTS
 - 2-5. OPERATING TEMPERATURE: -55 ° C TO +105 ° C.

LANshack

Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE: 2012/7/6	DESCRIPTION: DB25 Female Solder Cup Connector 25 Pin for Custom Pinout
CHECKED BY	SHEET 1 of 1	ITEM NO. LSBL-CON-D25-F-SC
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm