





DATE	REV.	REVISION	DRAFTING	CHECKED
2019.05.16	A/0	NEW	FQ	ZCY

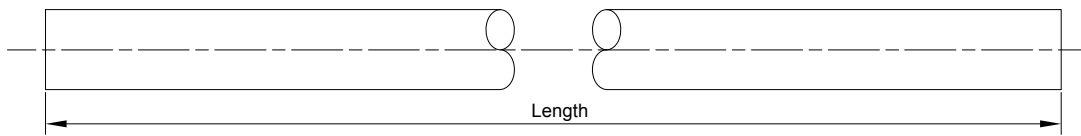

Marking: CAT.5E UTP (OUTDOOR USE) 24AWGX4P INSTALLATION CONFORM TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-1 XXXXFT

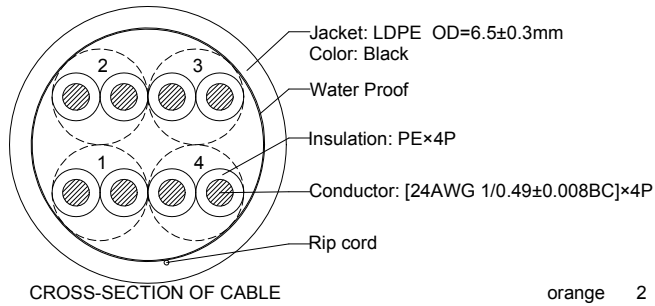

CROSS-SECTION OF CABLE

orange	2	green	3
white/orange		white/green	
blue	1	brown	4
white/blue		white/brown	

Parameter(20°C)

Item	Specified Value
Conductor resistance	≤95.8Ω/1000m
Rated Temperature	-20~75℃

Packing

Part No.	Color	Length (ft)	Wood axion	
			Size(cm)	
QT-CS8-UTP-08PDB-1000	Black	1000	D35xH25	



CONTACT
SALES@LANSHACK.COM
888-568-1230

Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X"	±3
.X	±0.10	.X"	±0.3
.XX	±0.05		

DRAW. NO	CUSTOMER	TITLE	DATE
		LAN CABLE Cat.5e U/UTP W/O Cross 24AWG×4P Solid Water-Blocking LDPE(outdoor), 1000ft	2019.05.16
SCALE	CHECK	DATE	SHEET
		2019.05.16 17:12:17	
UNIT	mm	APPROVED	

Material	Part Number	Note	RoHS	Reach	GP	HF	Other
1	2	3	4	5	6	7	8