

ENVELOPE / ASSEMBLY DRAWING




000000

SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY.
LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
G	CHANGE CONTACT DIAMETER	WMD	1/27/94	C. JONES
H	OPEN REAR OF SHELL \ CHG CONTACT PLATING TO GOLD	KMM	1/24/96	R. RICE
J	ADD OD DIMENSION OF CONTACT	KMM	7/18/96	R. RICE
K	CHANGE CONTACT OD	CZS	3/30/99	R. RICE

ALL DIMENSIONS ARE REFERENCE ONLY

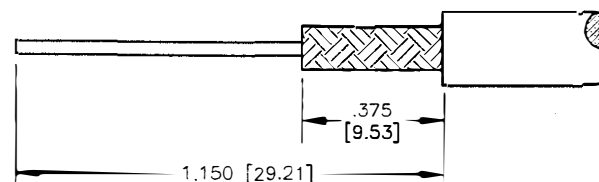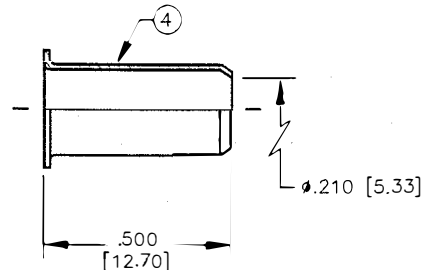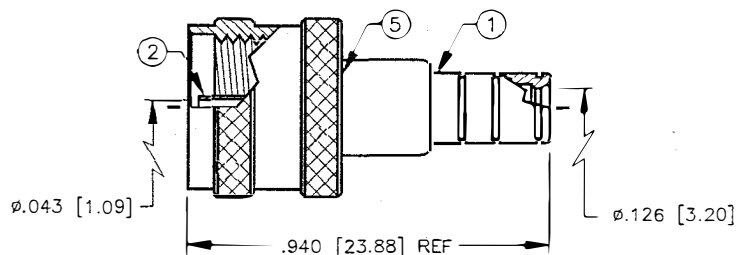

SUGGESTED CRIMP DIES: .052 & .213

SUGGESTED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 335 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0-2.5 GHz
INSERTION LOSS: ≤ -2 dB @ 2 GHz
VSWR MAX: 1.25:1 @ 2 GHz
FOR RG-58, 58A, 58C, 141, 141A, 400/U, BELDEN 8240,
8259, 8262, 9201, 9203, 9310, 9311,
COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL92463E

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:
DECIMALS DIAMETER

Buy at: **LANshack**

www.LANshack.com

RFU-600-1

MINI UHF MALE CRIMP

5	SHELL	1	BRASS	NICKEL	DRAWN		MINI UHF MALE CRIMP				
4	FERRULE	1	COPPER	NICKEL	C. ZUNIGA	3/30/99					
3	DIELECTRIC	1	DELIN	NONE	CHECKED		SIZE	CABLE GROUP	DWG NO.	REV	
2	CONTACT	1	BRASS	GOLD	<i>R. Rice</i>	4/7/99	A	C	7981	K	
1	BODY	1	BRASS	NICKEL	DR. DRAWN						
					M. P.	7/18/96					
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE	SCALE: 2:1	CAD FILE 13ARC B	SHEET 1 OF 1		