




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

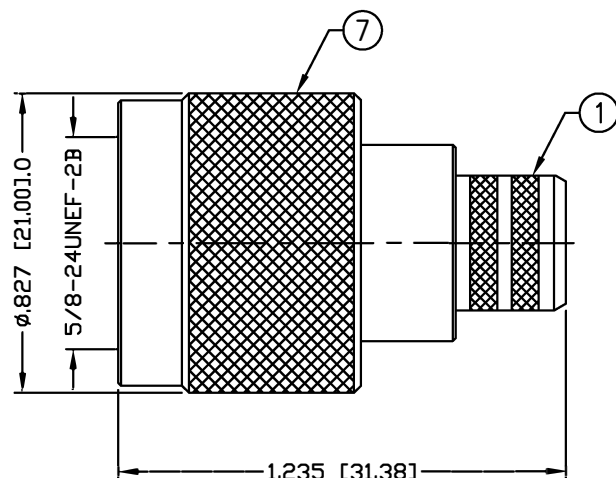

RECOMMENDED CRIMP DIE: .429"




RECOMMENDED CRIMP DIE: .118" OR .128"

* "SOLDER ONLY" FOR RG-8/U TYPE & "E" CABLE GROUP

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-11 GHz
VSWR: 1.3 Max. @ 9 GHz
INSERTION LOSS: .06 dB Max. $\times \sqrt{f\text{GHz}}$
WORKING VOLTAGE: 1k V rms @ sea level
TEMPERATURE RANGE: -65°C TO 85°C
INSULATION RESISTANCE: 5k M Ohms min.
(E) RG-8, 8A, 213/U, ALPHA 9008, 9213, BELDEN 8267, 9251, 9880, 89880, INTERCOMP 4085, 22132, TIMES AA-4478
(I) FOR BELDEN 8214, 9913, 9913F, 9914, *RG-8/U TYPE, CAROL C1180, TIMES AA-5886 & LMR-400 CABLE

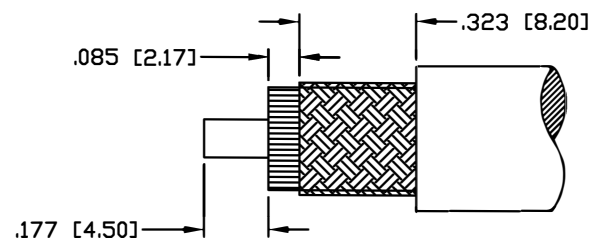

RECOMMENDED STRIPPING INSTRUCTIONS

1	BODY	1	BRASS	SILVER, 5 μ "	000486	
2	PIN	1	BRASS	GOLD, 3 μ "		
3	INSULATOR	1	PTFE	----		
4	RETAINING RING	1	BRASS	SILVER, 5 μ "		
5	GASKET	1	SI RUBBER	----		
6	GROUND RING	1	BRASS	SILVER, 5 μ "		
7	SHELL	1	BRASS	SILVER, 5 μ "		
8	FERRULE	1	BRASS	SILVER, 5 μ "		
9						
10					DRAWN	
11					C. ZUNIGA	8/8/06
12					CHECKED	
13						
14					ORJ DRAWN	
					P. BREAUX	8/20/92
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]
UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS

DIAMETER

Buy at: **LANshack**

www.lanshack.com | 888-568-1230

N PLUG, CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	E & I	RFN-1006-3I	S
SCALE:	NTS	CAD FILE	OUTLINE
SHEET	1	OF	1