
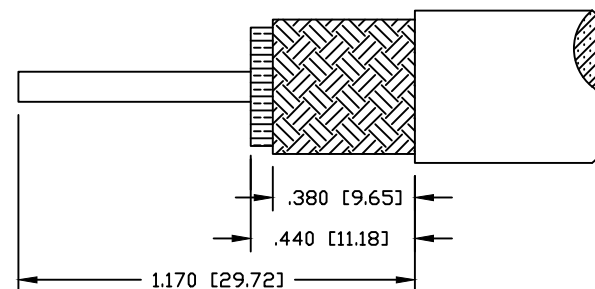


PART NO.

RFU-500

REV	DESCRIPTION	DWN	DATE	APPROVED
N	UPDATED DWG FORMAT AND CBL SPECS.	CZS	09/18/17	JDMc

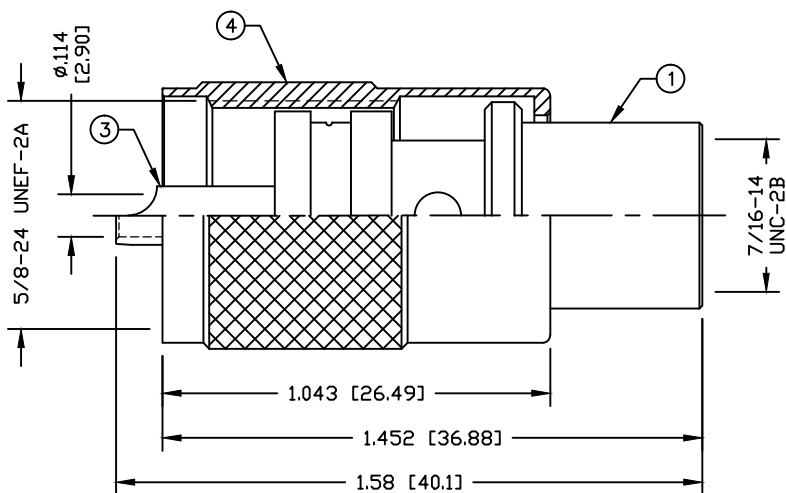

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: NON CONSTANT
 FREQUENCY RANGE: 0-300 MHz
 VOLTAGE RATING: 500 VOLTS RMS

(E) FOR RG-8, 8A, 213/U

(F) FOR RG-9, 9A, 9B, 214/U

(I) FOR BELDEN 9913, 9914, RG-8/U TYPE, RG-393/U & TIMES LMR-400

W/RFU-530 REDUCER

(C) FOR RG-58, 58A, 58C, 141, 141A, 400/U

(C1) FOR RG-55, 55A, 55B, 142, 142A, 142B & 223/U

(C2) FOR TIMES LMR-200, ALPHA 9848 & MSI-22

W/RFU-531 REDUCER

(D) FOR RG-59, 59A, 59B, 62, 62A, 62C 71, 140 & 210/U

(P) FOR ANTENNA SPECIALIST K214 & PRO-FLEX 800, TIMES AA3096 & COMM/SCOPE 2278 & 2279 CABLE

(X) FOR RG-8/X & 30/U, BELDEN 9258, TIMES LMR-240 & LMR-240 ULTRAFLEX

4	SHELL	1	BRASS	NICKEL
3	PIN	1	BRASS	SILVER
2	INSULATOR	1	DAP	---
1	BODY	1	BRASS	SILVER
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN C. ZUNIGA	09/18/17
CHECKED	
ORJ DRAWN S. SMITH	05/29/90

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

Buy at: **LANshack**

www.lanshack.com | 888-568-1230

UHF PLUG, SOLDER

SIZE	CABLE GROUP	DWG NO.	REV
A	MULTIPLE	RFU-500	N
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	