
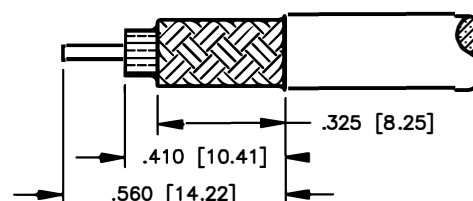
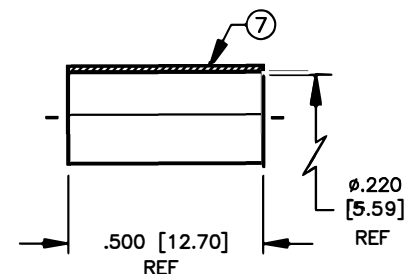



SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
A1	ENGINEERING RELEASE	PB	12/14/92	J. BENZ
B1	ADD INTERFACE DIMENSIONS / RPLS DWG #7687	PB	3/25/93	J. BENZ
C	CHANGE FERRULE DIMENSIONS	KMM	12/8/93	C. JONES
D	SEPARATE BODY FOR DIMENSIONS	KMM	7/16/97	R. RICE

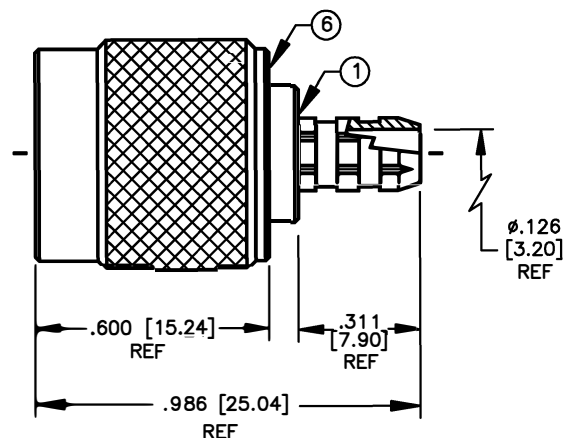

SUGGESTED STRIPPING INSTRUCTIONS
SUGGESTED CRIMP DIES: .068 & .213

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0-7 GHz
INSERTION LOSS: < -.2 dB @ 3 GHz
VSWR MAX: 1.3:1 @ 3 GHz
FOR RG-58, 58A, 58C, 141, 141A, 400/U, BELDEN 8240, 8259, 8262, 9201, 9203, 9310, 9311, COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL92463E

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS DIAMETER

DRAWN K. MAXWELL 7/16/97

CHECKED

ORJ DRAWN P. BREAUX 12/14/92

APPROVALS DATE

LANshack
Sales@LANshack.com | 888-568-1230

QT-RFT-1202-2B

TNC MALE CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	C	8007	D
SCALE: 2:1	CAD FILE 13ARC B	SHEET 1 OF 1	

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
7	FERRULE	1	BRASS	BLK CHROME
6	SHELL	1	BRASS	BLK CHROME
5	RETAINING RING	1	BRASS	NONE
4	GASKET	1	S.I. RUBBER	RED
3	DIELECTRIC	1	DELIN	NONE
2	CONTACT [CON-302-12]	1	BRASS	GOLD
1	BODY	1	BRASS	BLK CHROME