



**25 Gigabit Singlemode LC Duplex SFP28 Fiber  
Optic Transceiver  
Hot Pluggable and Cisco Compatible 10 km at  
1310 nm - 25GBASE-LR**

**SKU: QT-SM-DFSFP28-25G-10KM-1310NM**

## 1. Features

- Compatible with CPRI option10 24.33Gbps and 25GBASE 25.78Gbps
- Up to 10km transmission on SMF
- 1310nm DML laser transmitter
- SFP28 MSA compliant
- Built-in digital diagnostic functions
- Single +3.3V power supply
- Operating case temperature: -40 to +85 °C or 0 to +70 °C
- RoHS 6 Compliant

## 2. Application

- 25GBASE-LR
- 24.33Gbps CPRI



## 3. Overview

QuickTrex's transceivers are designed for 24.33Gbps and 25.78Gbps data rate over SMF and support up to 10km link length. They are compliant to IEEE802.3ba, SFF-8402, SFF-8432. Digital diagnostic monitoring interface compliant to SFF-8472 is available via an I2C interface.

## 4. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	T <sub>s</sub>	-40	-	+85	°C	1
Supply Voltage	V <sub>CC</sub>	-0.5	-	+4.0	V	
Operating Relative Humidity	RH	-	-	+95	%	

## 5. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	T <sub>C</sub>	-40	-	+85	°C	1
Operating Case Temperature	T <sub>C</sub>	0	-	+70	°C	2
Power Supply Voltage	V <sub>CC</sub>	3.135	3.3	3.465	V	
Power Supply Current	I <sub>CC</sub>	-	-	450	mA	
Maximum Power Dissipation	P <sub>D</sub>	-	-	1.5	W	
Bit Rate	BR	24.3	25.78	26.5	Gb/s	
Transmission Distance	TD		-	10	km	Over SMF


## 6. Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	$\lambda_t$	1295	1310	1325	nm	
Average Optical Power, 25GE	P <sub>avg</sub>	-4.5	-	2.5	dBm	
Optical Modulation Amplitude, 25GE	OMA	-2	-	-	dBm	
OMA-TDP, 25GE	OMA_TDP	-5	-	-	dBm	
Average Output Power (Laser Turnoff)	P <sub>OFF</sub>	-	-	-30	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Extinction Ratio, 25GE	ER	3.5	-	-	dB	
Transmitter and Dispersion Penalty	TDP	-	-	2.7	dB	
Optical Return Loss Tolerance	ORLT	-	-	11	dB	
<b>Receiver</b>						
Center Wavelength	$\lambda_r$	1260		1610	nm	
Stressed OMA Sensitivity, 25GE@5E-5		-	-	-9.6	dBm	1
OMA Sensitivity, 25GE@5E-5	P <sub>SEN_OMA</sub>	-	-	-13	dBm	1
Average Rx Sensitivity, 25GE@5E-5	P <sub>SEN</sub>	-	-	-12	dBm	1
Receiver Overload	P <sub>IN-OL</sub>	2.5	-	-	dBm	
Reflectance	Ref	-	-	-26	dB	
LOS Assert	LOS <sub>A</sub>	-30	-		dBm	
LOS De-assert	LOS <sub>D</sub>	-	-	-14	dBm	
LOS Hysteresis	LOS <sub>H</sub>	0.5	-	-	dB	

## 7. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
<b>Transmitter (Module Input)</b>						
Differential Data Input Amplitude	$V_{IN,P-P}$	200	-	900	mVpp	
Differential Input Impedance	$R_{in}$	-	100	-	$\Omega$	
TX_Fault	NormalOperation	$V_{IL}$	-0.3	-	0.4	V
	TX Fault	$V_{IH}$	2.4	-	$V_{CC}+0.3$	V
TX_Disable	NormalOperation	$V_{IL}$	-0.3	-	0.8	V
	Laser Disable	$V_{IH}$	2.0	-	$V_{CC}+0.3$	V
<b>Receiver (Module Output)</b>						
Differential Data Output Amplitude	$V_{OUT,P-P}$	300	-	900	mVpp	
Differential Output Impedance	$R_{out}$	-	100	-	$\Omega$	
Differential Termination Mismatch		-	-	$\pm 5$	%	
Output Rise/Fall Time, 20%~80%	$T_R$	9.5	-	-	ps	
Rx_LOS	Normal Operation	$V_{OL}$	-0.3	-	0.4	V
	Lose Signal	$V_{OH}$	2.4	-	$V_{CC}+0.3$	V

## 8. Pin Definition

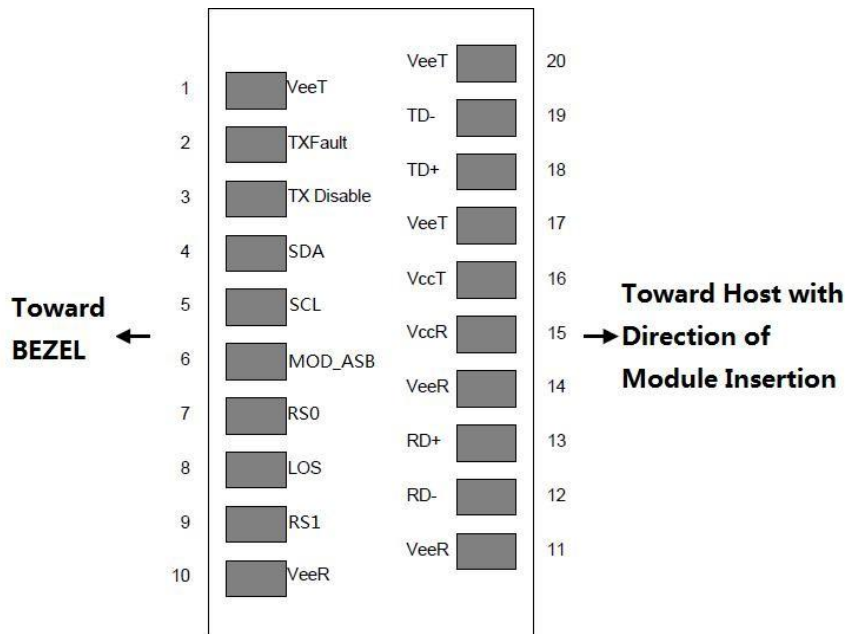

Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	Tx_Fault	Transmitter Fault - High indicates a fault condition	2
3	Tx_Disable	Transmitter Disable – High or open disables the transmitter	
4	SDA	2-wire Serial Interface Data Line (MOD-DEF2)	3
5	SCL	2-wire Serial Interface Clock (MOD-DEF1)	3
6	MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	
7	RS0	Rate Select 0 – Not used, Presents high input impedance	5
8	RX_LOS	Receiver Loss of Signal(LVTTL-O). Logic 0 indicates normal operation	4
9	RS1	Rate Select 1 – Not used, Presents high input impedance	5
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Inverse Received Data out (CML-O), AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VeeR	Receiver Ground	1
15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VeeT	Transmitter Ground	1


**Notes:**

1. Module ground pins GND are isolated from the module case.
2. Tx\_Fault is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on Host board.
3. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V.
5. RS0 and RS1 pins are pulled low to GND with a resistor > 30KΩ in module.

## 9. Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 85	±5	°C	Internal
Voltage	3.15 to 3.45	±5%	V	Internal
Tx Bias Current Per Lane	10 to 100	±10%	mA	Internal
Tx Output Power Per Lane	-5 to +3	±3	dBm	Internal
Rx Power (Each Lane)	-12 to 0	±3	dBm	Internal

## 10. Outline Dimensions (mm)

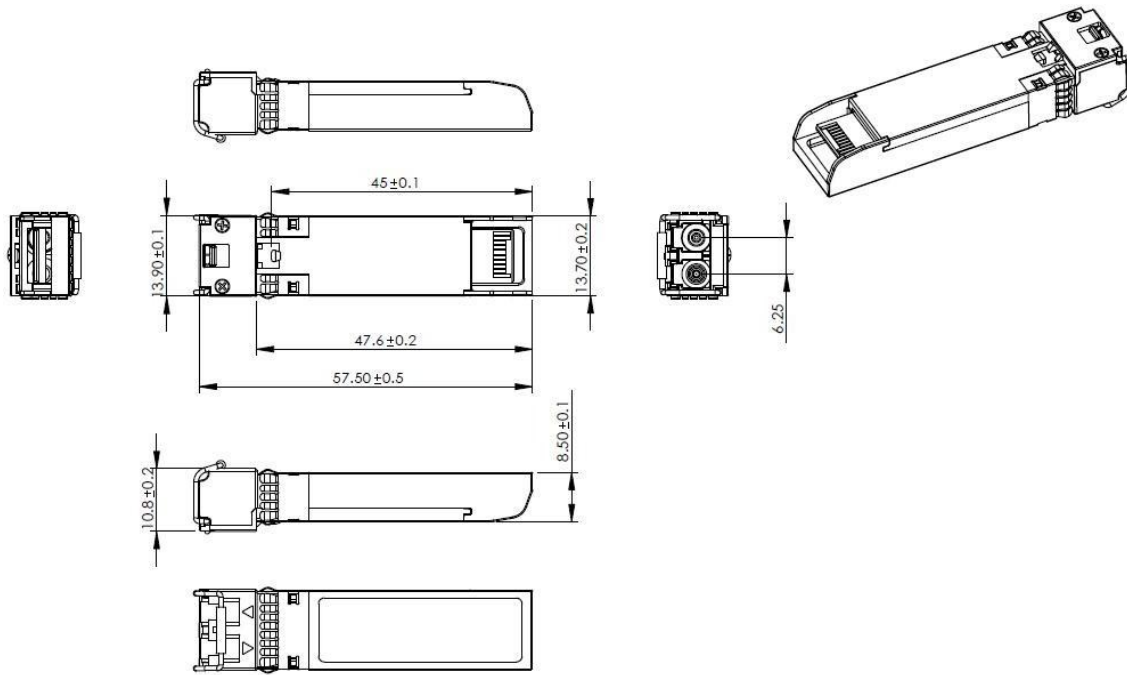

**LANshack**  
Sales@LANshack.com | 888-568-1230